



STRIP BRUSH WITH RUBBER PROFILE


These watertight flexible strip brushes provide high sealing and at the same time flexibility, thanks to the adaptability of the filaments. Application examples: optimal sealing against dust, draughts, heat loss or dirt. Virtually wear-free insulation. Manufactured with various inserts, always supplied on 25 metre spools.

Characteristics

- High airtightness and flexibility
- Protective and cushioning function at the same time
- Wear-free sealing of the contact surfaces
- High bending strength and dimensional stability
- Can be cut to the desired size
- Delivered on 25 metre reels except for model (282044)

Profile 1

282040

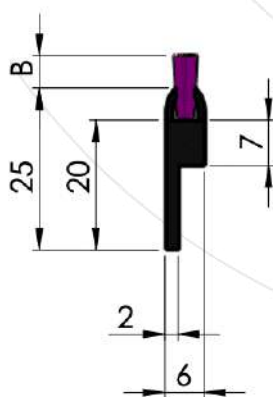

Sacema

Filament material	Polyamide 6 (PA6)
-------------------	-------------------

Fibre diameter (mm)	Fibre exit (mm)
0,10	3 o 5
0,15	7

See the update
of the Strip Brush with
Rubber Profile



Last updated: 19 May 2021

*These documents are the exclusive property of Cepillos Sacema, S.L. Their total or partial reproduction without our written authorisation is prohibited, as well as their improper use and/or exhibition to third parties. Subject to errors and technical modifications.


Sacema

Contact: sacemagroup.com
+34 984 06 80 80 - info@sacema.es



STRIP BRUSH WITH RUBBER PROFILE


282041

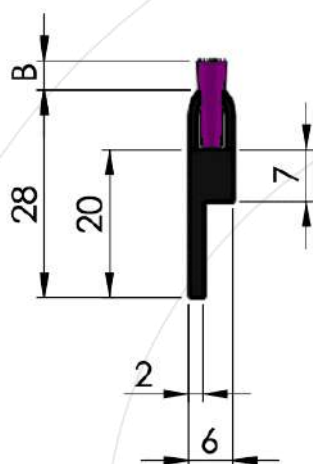

Filament material	Polyamide 6 (PA6)
--------------------------	-------------------

Fibre diameter (mm)	Fibre exit (mm)
0,10	2
0,15	4 o 7

282042

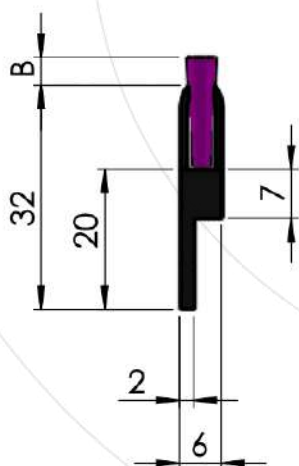

Filament material	Polyamide 6 (PA6)
--------------------------	-------------------

Fibre diameter (mm)	Fibre exit (mm)
0,10	4 o 2
0,20	7

Sacema

Last updated: 19 May 2021

*These documents are the exclusive property of Cepillos Sacema, S.L. Their total or partial reproduction without our written authorisation is prohibited, as well as their improper use and/or exhibition to third parties. Subject to errors and technical modifications.

Sacema


Contact: sacemagroup.com
+34 984 06 80 80 - info@sacema.es



STRIP BRUSH WITH RUBBER PROFILE

Profile 2

282043




Filament material	Polyamide 6 (PA6)
--------------------------	-------------------

Fibre diameter (mm)	Fibre exit (mm)
0,15	2 o 4
0,20	6

Profile 3

282044

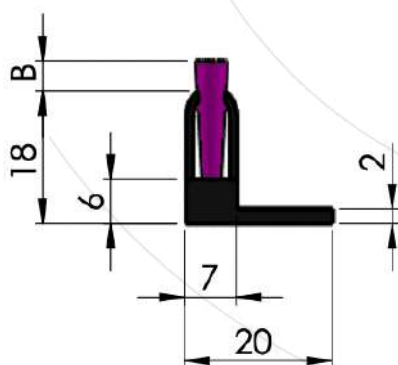

Filament material	Polyamide 6 (PA6) (Ø 0,15mm)
--------------------------	-------------------------------

Holder length (mm)	Fibre exit (mm)
1000	2 o 4 o 6
2000	2 o 4 o 6
3000	2 o 4 o 6

Sacema

Last updated: 19 May 2021


*These documents are the exclusive property of Cepillos Sacema, S.L. Their total or partial reproduction without our written authorisation is prohibited, as well as their improper use and/or exhibition to third parties. Subject to errors and technical modifications.



STRIP BRUSH WITH RUBBER PROFILE

Profile 4

282045

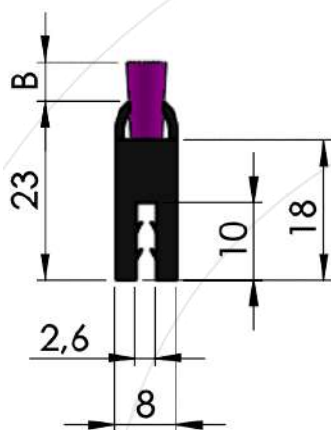


Filament material	Polyamide 6 (PA6)
--------------------------	-------------------

Fibre diameter (mm)	Fibre exit (mm)
0,10	3 o 5
0,15	7

Plate thickness 0.6-1.5 mm

282046

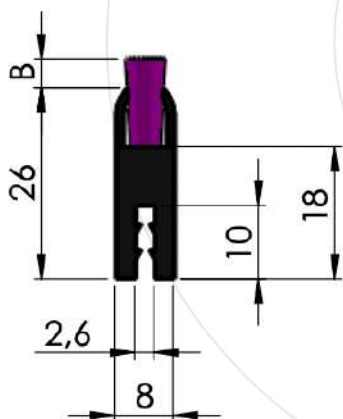


Filament material	Polyamide 6 (PA6)
--------------------------	-------------------

Fibre diameter (mm)	Fibre exit (mm)
0,10	2
0,15	4 o 7

Plate thickness 0.6-1.5 mm

282047

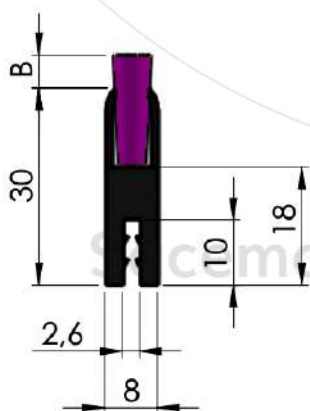

Filament material	Polyamide 6 (PA6)
--------------------------	-------------------

Fibre diameter (mm)	Fibre exit (mm)
0,15	3
0,20	5 o 8

Plate thickness 0.6-1.5 mm


Last updated: 19 May 2021

*These documents are the exclusive property of Cepillos Sacema, S.L. Their total or partial reproduction without our written authorisation is prohibited, as well as their improper use and/or exhibition to third parties. Subject to errors and technical modifications.



STRIP BRUSH WITH RUBBER PROFILE

282048

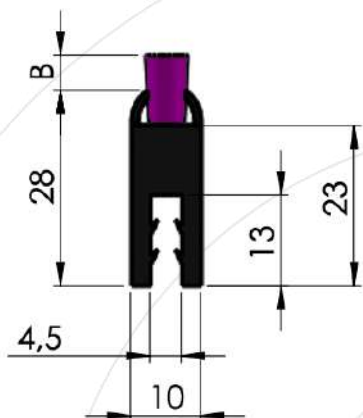


Filament material	Polyamide 6 (PA6)
--------------------------	-------------------

Fibre diameter (mm)	Fibre exit (mm)
0,15	5
0,20	7

Plate thickness 1,6 - 3 mm

282049

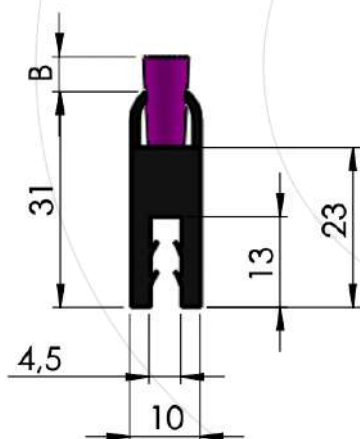


Filament material	Polyamide 6 (PA6)
--------------------------	-------------------

Fibre diameter (mm)	Fibre exit (mm)
0,20	5 o 8

Plate thickness 1,6-3 mm

282050

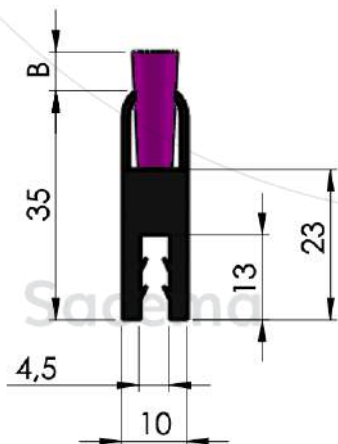

Filament material	Polyamide 6 (PA6)
--------------------------	-------------------

Fibre diameter (mm)	Fibre exit (mm)
0,20	5
0,30	8

Plate thickness 1,6-3 mm

Last updated: 19 May 2021

*These documents are the exclusive property of Cepillos Sacema, S.L. Their total or partial reproduction without our written authorisation is prohibited, as well as their improper use and/or exhibition to third parties. Subject to errors and technical modifications.