



HYDROCARBON INDUSTRIAL HOSE

Applications


Driving of petrol and hydrocarbon derivatives.
Industrial engines and applications.

Dimensions

Sections of 1 to 5 metres, and in sections of up to 40 metres depending on measures.

Temperature range

From -20°C to +90°C.

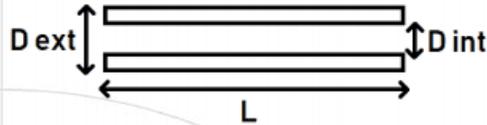

7500 series - Impulsion

Manufacture

Smooth black or green synthetic rubber-based interior. Textile reinforcement with high tenacity synthetic helicoidal cords. Black synthetic rubber exterior.

Working pressures

Ø Inner	Supported pressure
10 - 60	15
65 - 100	10

7200 series - Impulsion/Aspiration with wire

Manufacture

Smooth black or green synthetic rubber-based interior. Textile reinforcement with high tenacity synthetic helicoidal cords. Black synthetic rubber exterior.

Working pressures

Ø Inner	Supported pressure
10 - 38	8
40 - 50	6
51 - 80	4
85 - 100	3

Check the update
of the Industrial Hoses



Sacema

Last update: 12 March 2021

*These documents are the exclusive property of Cepillos Sacema, S.L. Their total or partial reproduction without our written authorisation is prohibited, as well as their improper use and/or exhibition to third parties.

Sacema

Contact: www.sacemagroup.com
+34 984 06 80 80 - info@sacema.es