



RUBBER REDUCTIONS

Applications

Passage of air, water...etc.

Manufacture

Rubber interior. Can be manufactured with/without textile reinforcement, with/without wire. Depending on its use, consult the most suitable manufacture.

Temperature range


From -30°C to $+180^{\circ}\text{C}$, depending on the material.

Availability

Various geometries available in the catalogue. Check availability.



Sacema

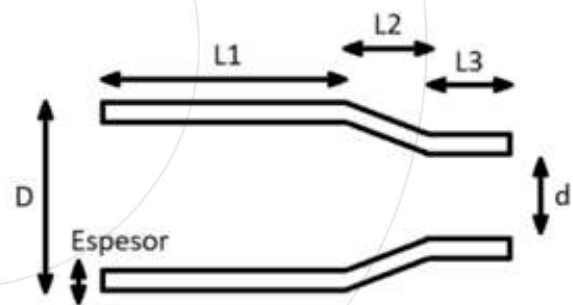

See the update
of Rubber
Reductions



Last update: 12 March 2021

*These documents are the exclusive property of Cepillos Sacema, S.L. Their total or partial reproduction without our written authorisation is prohibited, as well as their improper use and/or exhibition to third parties.

Sacema

Contact: www.sacemagroup.com
[+34 984 06 80 80](tel:+34984068080) - info@sacema.es